



# COMMERCIAL VENETIAN BLINDS

**Venetian blinds are a versatile form of shading suitable for a wide range of applications.**

Our Commercial Aluminium Venetian blinds consist of horizontal, overlapping slats that are typically formed from high tensile aluminium. The slats are suspended from a headrail and supported by ladder braid or ladder tape. Much of the appeal of these luxurious blinds is obvious at first sight. The elegance they bring to windows, the colourful contribution to interior decor. But these attractive blinds also have functional advantages. A flick on the control cord and they give you as much (or as little) sunshine or light as required, bring privacy, and add insulation against cold air from the window panes, not to mention extra smartness to the outside of the premises.

Depending on the individual sizes and styles, Venetian blinds can be operated manually using cords and wands or switches. The slim profile of these blinds permits makes them ideal for installing between glazing, such as internal partition walls. They are also available in an extensive range of colours, patterns and finishes including perforated.



## **Description:**

The following sizes of blinds are available:

50mm Venetian Blind, (2 inch) slats.

35mm Venetian Blind, (1 3/8 inch) slats.

25mm Venetian Blind, (1 inch) slats.

16mm Venetian Blind, ( 5/8 inch) slats.

The blind typically comprises of a 'U' section headrail in which all mechanisms are contained. Super quality slats are supported on a polyester ladder lace. The bottom rail is of tubular or semi-tubular section and the blind is operated by means of long lasting nylon cords. The designs are suitable for internal installation in all types of commercial, offices and educational buildings.

## **Colours**

These blinds are available in a wide choice of colours and finishes.

Colour Selectors are available from Saxon Blinds Ltd.


## **Advisory Service**

Saxon Blind's surveyors are freely available to assist and advise upon all matters relating to the fixing and application of Venetian blinds. Services include the preparation of detailed schemes for either standard or special blinds involving mechanical or electrical means of control.



# COMMERCIAL VENETIAN BLINDS

## SPECIFICATIONS

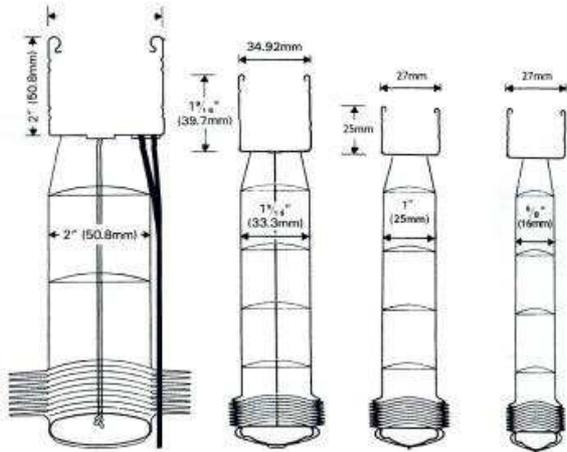

Saxon Venetian Blinds are manufactured in accordance with B.S.3415 1986, assembled and installed with the manufacturers fixing instructions supplied with every blind, together with simple operating instructions.


### Headrails

**Deluxe 50mm, 35mm 25mm & 16mm**

'U' Section manufactured from aluminium alloy strip to B.S1470 1987

### Standard 50mm

Is a 'U' Section manufactured from low carbon electro galvanised mild steel strip to B.S1449 part 1B 1983

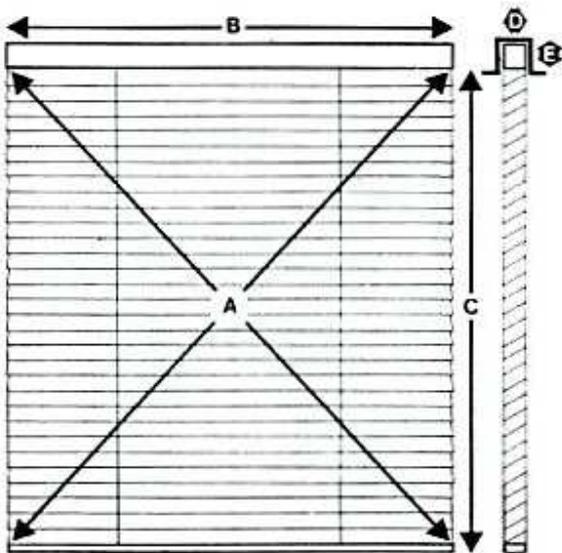

### Bottom Rail

Are manufactured from material to match the headrail and formed to either full oval or semi-tubular section. The open ends of the rails are closed with moulded caps.

### Stats

Are manufactured from resilient aluminium alloy strip to B.S.1470 1987 N.S.5b in the super hard condition.

### Ladder Lace

Is manufactured from a polyester fibre.

### Mechanisms

Are concealed within the headrail and include crash-proof cord lock and positive non-slip tilter unit capable of traversing the slats through 180°. All drums, gears and pulleys are manufactured from injection moulded plastic, giving mechanical strength without adding weight.

### Dimensions

Fit blinds at least 25mm or 1 inch clear of any window surface or window furniture projections.

	50mm	35mm	25mm	16mm
A Maximum Area	13.38m <sup>2</sup>	5.57m <sup>2</sup>	5.57m <sup>2</sup>	
B Maximum Width	3050mm	3050mm	3050mm	
C Maximum Drop	3500mm	3500mm	3500mm	
D Blind box width		76.2mm		
E Blind box depth				