

Somfy - Sonesse 40 RTS Tubular Motor

TECHNICAL CHARACTERISTICS


230V AC mains powered with integral RTS radio receiver and electronic limit switch unit.



Index protection rating	IP 44	Temperature working range	0°C - 60°C
Limit switch unit	Electronic (RTS)	Insulation class	Class II (No earth wire required)

TECHNICAL DATA	404S2	406A2	409R2
Supply	230V / 50Hz		
Torque	3 Nm	6 Nm	9Nm
Speed	30 rpm	20 rpm	12 rpm
Rated power consumption	95 Watt	120 Watt	220 Watt
Rated current	0.44 amp	0.55 amp	0.98 amp
Cable (white) length	2.5 m		
Running time before thermal cut out	5 min		
Average running noise (Somfy)	42 dBA	45 dBA	40dBA
Minimum tube diameter	50 mm		
Minimum blind width	600 mm	600 mm	600 mm
Maximum Fabric Weight	13 Kg	27 Kg	40 Kg
Motor weight	1.22 Kg	1.25 Kg	1.35 Kg
Radio Frequency	433.42 MHz		
Radio range (in-doors)	20 m		

DIMENSIONS

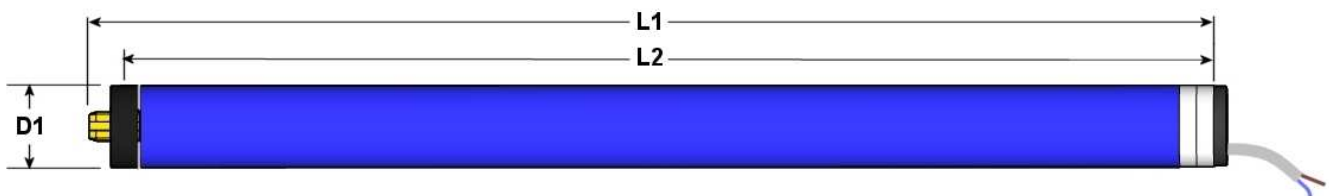

D1 (motor diameter mm)	38 mm		
L1 (mm)	504	535	535
L2 (mm)	480	511	511

