



Technical Features

Voltage Supply	230V 50Hz	Limit Switch Capacity	250 Turns
Index Protection Rating	IP44	Temperature Range	0°C - 60°C
Limit Switch Type	Electronic (RTS)	Insulation Class	Class 1 for 230V

Dimensions

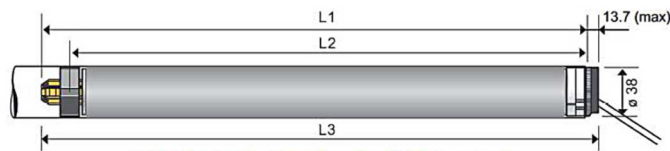

2 mounting holes for self tapping screws.
Dia. 4 mm (cat #100405B) Depth 9 mm
spaced 1.14" (29 mm) apart.

Self tapping mounting screws are included with each motor.

L1	504 mm	535 mm	535 mm
L2	480 mm	511 mm	511 mm
L3	517 mm	548 mm	548 mm
Cable Length	3.5 metre		

Specifications

Torque	3 Nm	6 Nm	9 Nm
Nominal Voltage	230V 50Hz		
Rated Current	0.43A	0.6A	0.45A
Speed	30 rpm	20 rpm	12 rpm
Thermal Protection	4 minutes		
Radio Frequency	433.42 MHz		
Sound Level	42 dBA	44 dBA	40 dBA

Sound Level:

According to standards
ISO 3741 NF 31022 in dBA
ref 1pW at nominal torque
without end product.

Power Cable

RTS

